

Stratification of Particulate and VOC Pollutants in
Horizontal Flow Paint Spray Booths

(U.S.) Environmental Protection Agency, Research Triangle Park, NC

1990



U.S. Department of Commerce
National Technical Information Service

NTIS

AEERL-P-590 TECHNICAL REPORT DATA <i>(Please read Instructions on the reverse before complete)</i>		
1. REPORT NO. EPA/600/D-90/028	2.	3. PB90-220831
4. TITLE AND SUBTITLE Stratification of Particulate and VOC Pollutants in Horizontal Flow Paint Spray Booths	5. REPORT DATE	
	6. PERFORMING ORGANIZATION CODE	
7. AUTHOR(S) Charles H. Darwin	8. PERFORMING ORGANIZATION REPORT NO.	
9. PERFORMING ORGANIZATION NAME AND ADDRESS See Block 12	10. PROGRAM ELEMENT NO.	
	11. CONTRACT/GRANT NO. NA (Inhouse)	
12. SPONSORING AGENCY NAME AND ADDRESS EPA, Office of Research and Development Air and Energy Engineering Research Laboratory Research Triangle Park, NC 27711	13. TYPE OF REPORT AND PERIOD COVERED Published paper; 9/88-10/89	
	14. SPONSORING AGENCY CODE EPA/600/13	
15. SUPPLEMENTARY NOTES Author Darwin's Mail Drop is 61; his phone number is 919/541-7633. Presented at 14th Annual Army Environmental Research and Development Symposium, Williamsburg, VA, 11/14-16/89.		
16. ABSTRACT The paper discusses stratification of particulate and volatile organic compound (VOC) pollutants in horizontal flow paint spray booths, as part of a joint U.S. Air Force/EPA research and development program on emissions from paint spray booths. The test program discussed in this paper was designed to characterize the pollutants both within and exiting a typical back-draw booth for which emissions control strategies are being developed. The results of one series of tests indicate that the pollutants, both particulate and VOC, fall to the lower level of the booth or stratify at the level at which they were generated. This might be expected since the densities of typical pollutants found in spray booths are greater than air. The results showed, however, that the concentration of pollutants in the lower level prior to exiting the booth was significantly greater than expected. Data indicated that, for the 16 ft (4.9 m) high booth tested, the concentration at the exit of the booth below the 8 ft (2.4 m) level was 5-25 times greater than the concentration above that level. The importance of these findings is that it might be possible to partition a booth's air flow into two zones, one lean and the other concentrated. The concentrated zone could be directed to a proportionally smaller VOC control system of significantly less capital and operating cost.		
17. KEY WORDS AND DOCUMENT ANALYSIS		
a. DESCRIPTORS	b. IDENTIFIERS/OPEN ENDED TERMS	c. COSATI Field/Group
Pollution Spray Painting Particles Organic Compounds Volatility Stratification	Pollution Control Stationary Sources Particulate Volatile Organic Compounds	13B 13H 14G 07C 20M
18. DISTRIBUTION STATEMENT Release to Public	19. SECURITY CLASS (This Report) Unclassified 20. SECURITY CLASS (This page) Unclassified	21. NO. OF PAGES 13 22. PRICE

NOTICE

This document has been reviewed in accordance with U.S. Environmental Protection Agency policy and approved for publication. Mention of trade names or commercial products does not constitute endorsement or recommendation for use.

Stratification of Particulate and VOC Pollutants
In Horizontal Flow Paint Spray Booths

By

Charles H. Darwin
Air and Energy Engineering Research Laboratory
U. S. Environmental Protection Agency
Research Triangle Park, NC 27711

Introduction

The U.S. Environmental Protection Agency (EPA), in a joint program with the U.S. Air Force, has been conducting a research and development test program on emissions from paint spray booths. The goal of the program is to develop emissions control concepts that will permit efficient and economical control of pollutants from these sources. One approach is to reduce the volume of gases from the painting operation that must be processed in a control system. This could result in a corresponding reduction of control system capital and operating costs. This test program on an aircraft parts paint spray booth was designed to characterize the pollutant discharges both within and exiting a typical back-draw spray booth for which emissions control and flow reduction strategies are being developed.

The testing program from which the results of this paper are based represents two distinct efforts. The first was to assess the internal booth environment to define the industrial hygiene conditions within the booth, and the second was to define the emissions parameters which might govern the operating capability and limitations of a control concept. This paper presents the results of particulate and volatile organic compound (VOC) pollutant concentrations and flow studies of a horizontal flow spray booth. The results of the program indicate that flow management schemes in this type of booth might be devised which take advantage of the natural flow pattern and physical/chemical properties of the generated pollutants. This paper presents these findings and their implications for devising economical and efficient booth control strategies.

Site and Test Description

The objectives of the experiments were to determine how and where pollutants passed through and from the booth and the areas of highest concentration. The sampling scheme devised allowed development of a three dimensional representation of the concentration profile in the booth during painting. Thus, it was possible to observe how concentrations varied along the length of the booth and at different heights in the booth.

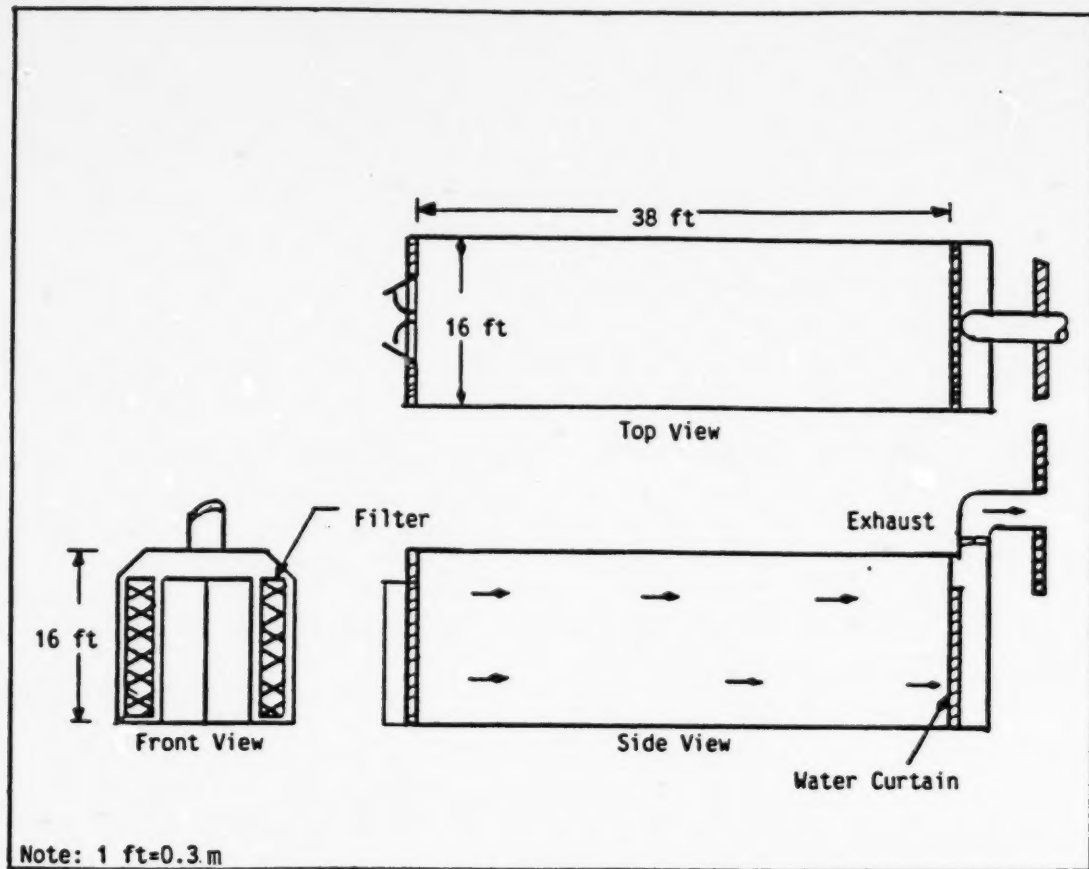


Figure 1. Spray booth diagram.

The test site was a horizontal-flow back-draw spray booth with air flowing from the front to the rear of the booth exiting through a particulate removal water curtain. Figure 1 describes the general configuration and dimensions of the booth. The measured flow rate through the booth ranged between 11,000 and 11,500 SCFM (5.2 and 5.4 m³/s).

The booth was instrumented with National Institute of Occupational Safety and Health (NIOSH) personal samplers positioned to form an approximate three dimensional grid matrix scheme inside the paint booth. The sampling instruments were positioned in the booth to define the average particulate concentrations experienced by each respective grid section during the test episode. Figure 2 illustrates the top and side views of the instrument locations in the booth. A total of 21 grid points were located in the booth. Three tests were performed to determine particulate concentration profiles in the booth using the NIOSH 500 sampling protocol and NIOSH personal sampling instruments. In addition, measurements were taken in the duct and at the painters' breathing zone to define duct and breathing zone particulate concentrations relative to the general booth interior. Particulate concentrations in the duct were determined using EPA Method 5 emissions sampling procedures.

Two tests were performed to define average VOC concentrations within the booth. The same grid scheme and sampling locations were used as described for the particulate tests. These experiments were conducted in accordance with the NIOSH 1300 procedure and using personal sampling instruments. Duct VOC measurements were taken using EPA Method 25 and Bay Area Air Quality Management District (BAAQMD) Method ST-7. Each painting episode and sample collection experiment lasted approximately 40 minutes.

Items painted during the experiments were general aircraft ground equipment of various sizes and shapes ranging up to approximately 8 ft (2.4 m) in height. They were selected to represent a range of items typically painted in a spray booth.

Results

Particulate:

The results of the particulate experiments indicate that the average paint particle concentration measurements tend to stratify at approximately the vertical height at which it was generated. To show this phenomenon, the concentration values at each respective height and length along the width of the booth were plotted logarithmically for each test. This permitted a determination of the relative average concentration along the length of the booth for any horizontal plane defined by the grid sections in that plane. Figures 3, 4, and 5, developed from each test, respectively, are an average of those values. They represent the average concentration along the length of the booth

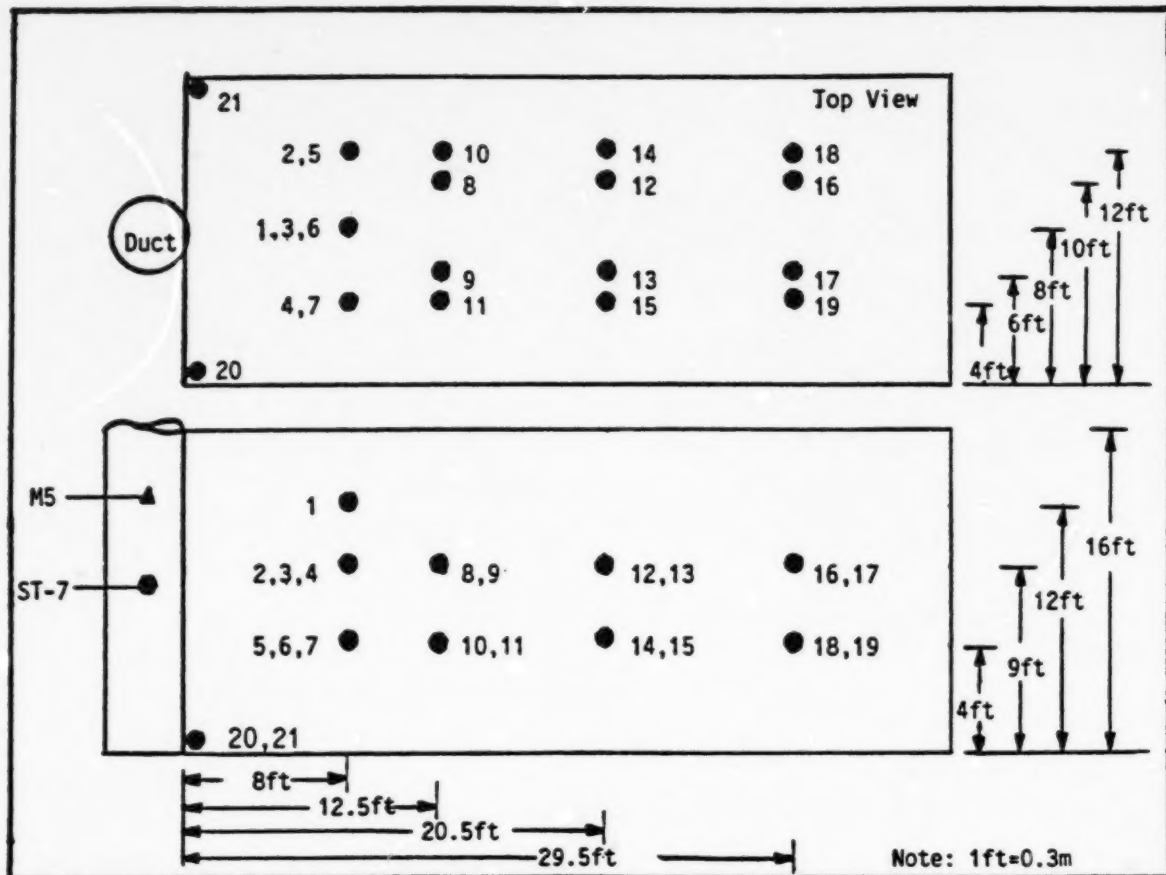


Figure 2. Booth sampling locations.

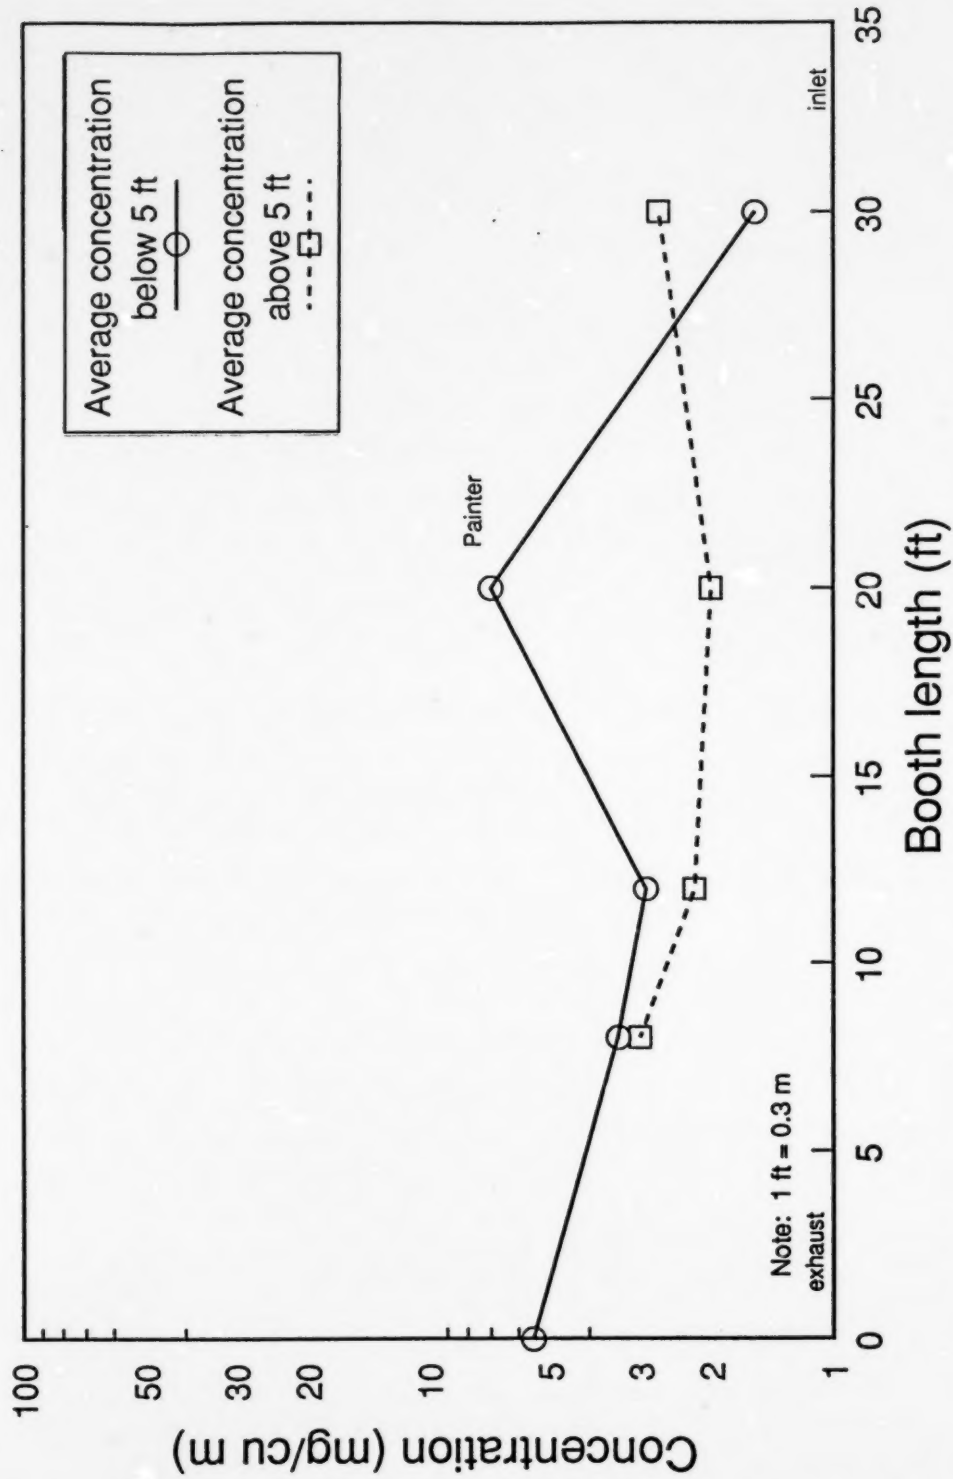


Figure 3. Average particulate concentration along length of test booth, particulate test 1.

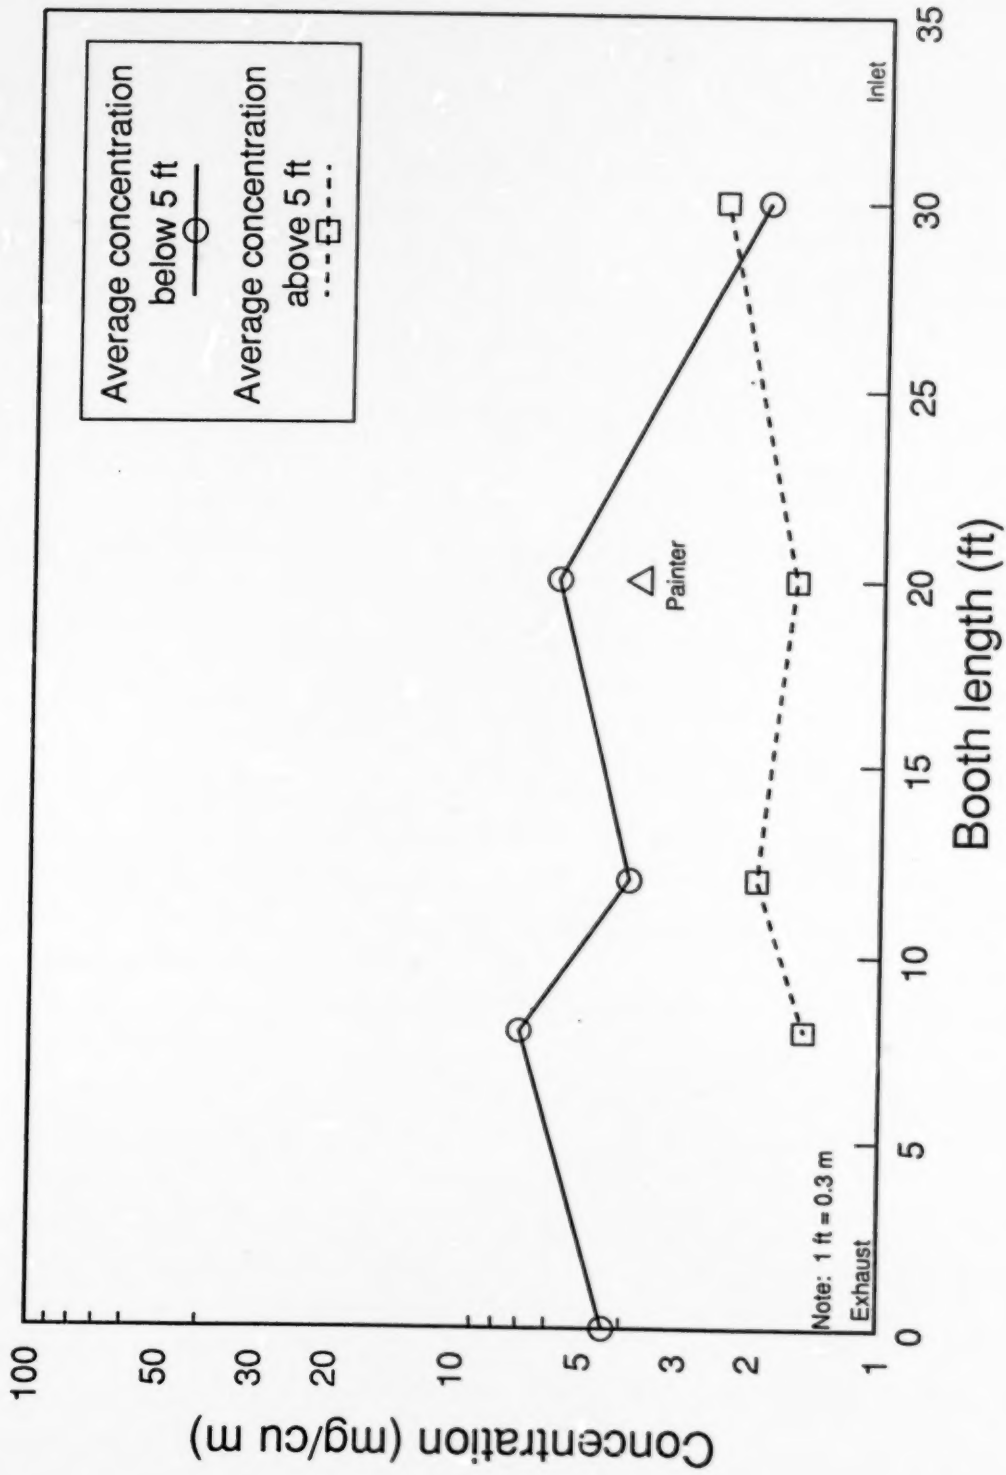


Figure 4. Average particulate concentration along length of test booth, particulate test 2.

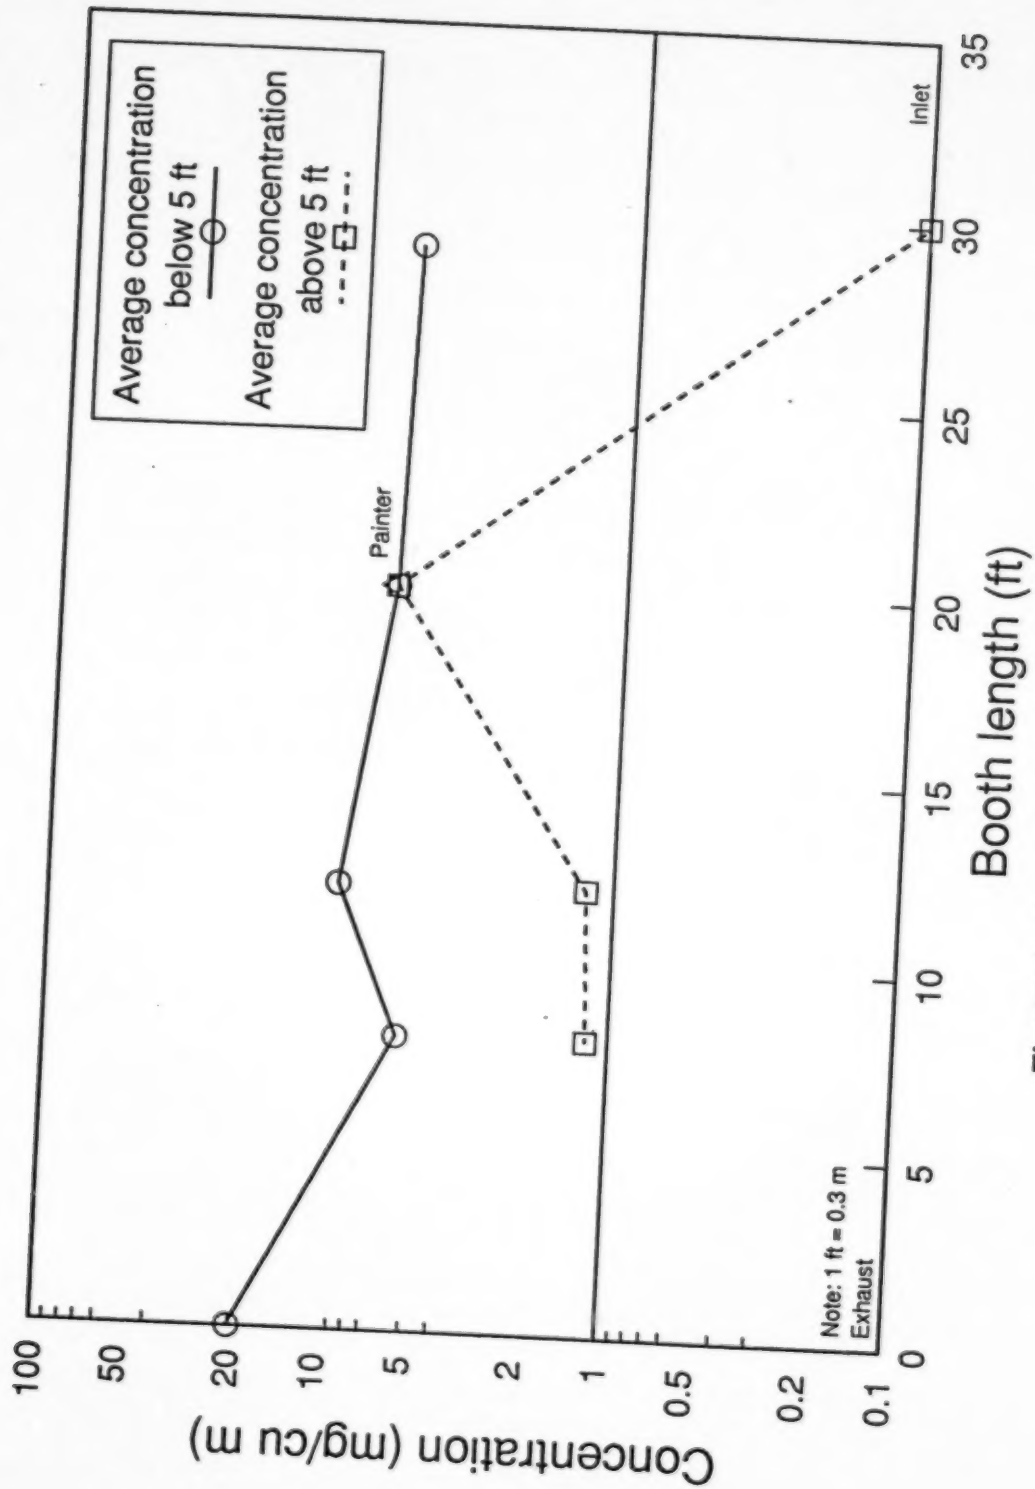


Figure 5. Average particulate concentration along length of test booth, particulate test 3.

for height ranges of 0-5 and 6-12 ft (0-1.5 and 1.8-3.7 m).

As indicated in Figures 3, 4, and 5, two distinct concentration regions are indicated. The concentration profile indicated that the particulate loadings in the lower portion of the booth were from 40 to 95 percent greater than those observed in the upper region of the booth.

Volatiles (VOC):

The volatile organic compound (VOC) test utilized the same sampling instrumentation and locations described for the particulate experiments. The VOC results indicated a more distinct separation of the concentration ranges than those defined for particulates. The VOC concentration profiles clearly tend to decrease in the upper levels of the booth and correspondingly increase in the lower level of the booth as the downstream distance from the painting zone increases. Figures 6 and 7 present the results of those experiments. In Figure 6, VOC test 1, the average concentration in the upper portion of the booth was measured at 8 ug/l or 3 percent of the average concentration, 271 ug/l, measured in the lower portion of the booth. Similarly, in Figure 7, the concentration in the upper portion of the booth was observed to be 22 ug/l, or 20 percent of the lower booth concentration, 108 ug/l.

Conclusions

The finding that the average concentration at the higher levels of the booth is typically lower and tends to decrease as the distance from the painting zone increases can be considered important in the design of horizontal flow spray booths. The painting zone was located between 10 and 25 ft (3.0 and 7.6 m) from the discharge end of the booth. The results indicate that the particulate matter does not rise from the general level of paint application which would have resulted in equalization of concentration at all levels of the booth downstream from the painting zone. Little vertical mixing of the pollutants was apparent. More importantly the results indicate that the greatest mass of particulate matter or paint overspray falls to and concentrates at the lower level of the booth as it proceeds to the exhaust exit of the booth. As confirmed by the results, it would be expected intuitively that the particulate matter would fall since it is heavier than air. Conventional booth design, however, seems to assume that the pollutant establishes an equilibrium in the booth which would result in approximately the same concentration at all downstream levels of the booth.

Similarly and equally important is the dispersion of VOCs in the booth. Similar to the particulate trend, the VOC concentration tended to increase as it approached the lower booth exhaust area. However, the degree of concentration is indicated to be even greater with as much as 80 percent of the generated VOC exhausting from the lower portion of the booth.

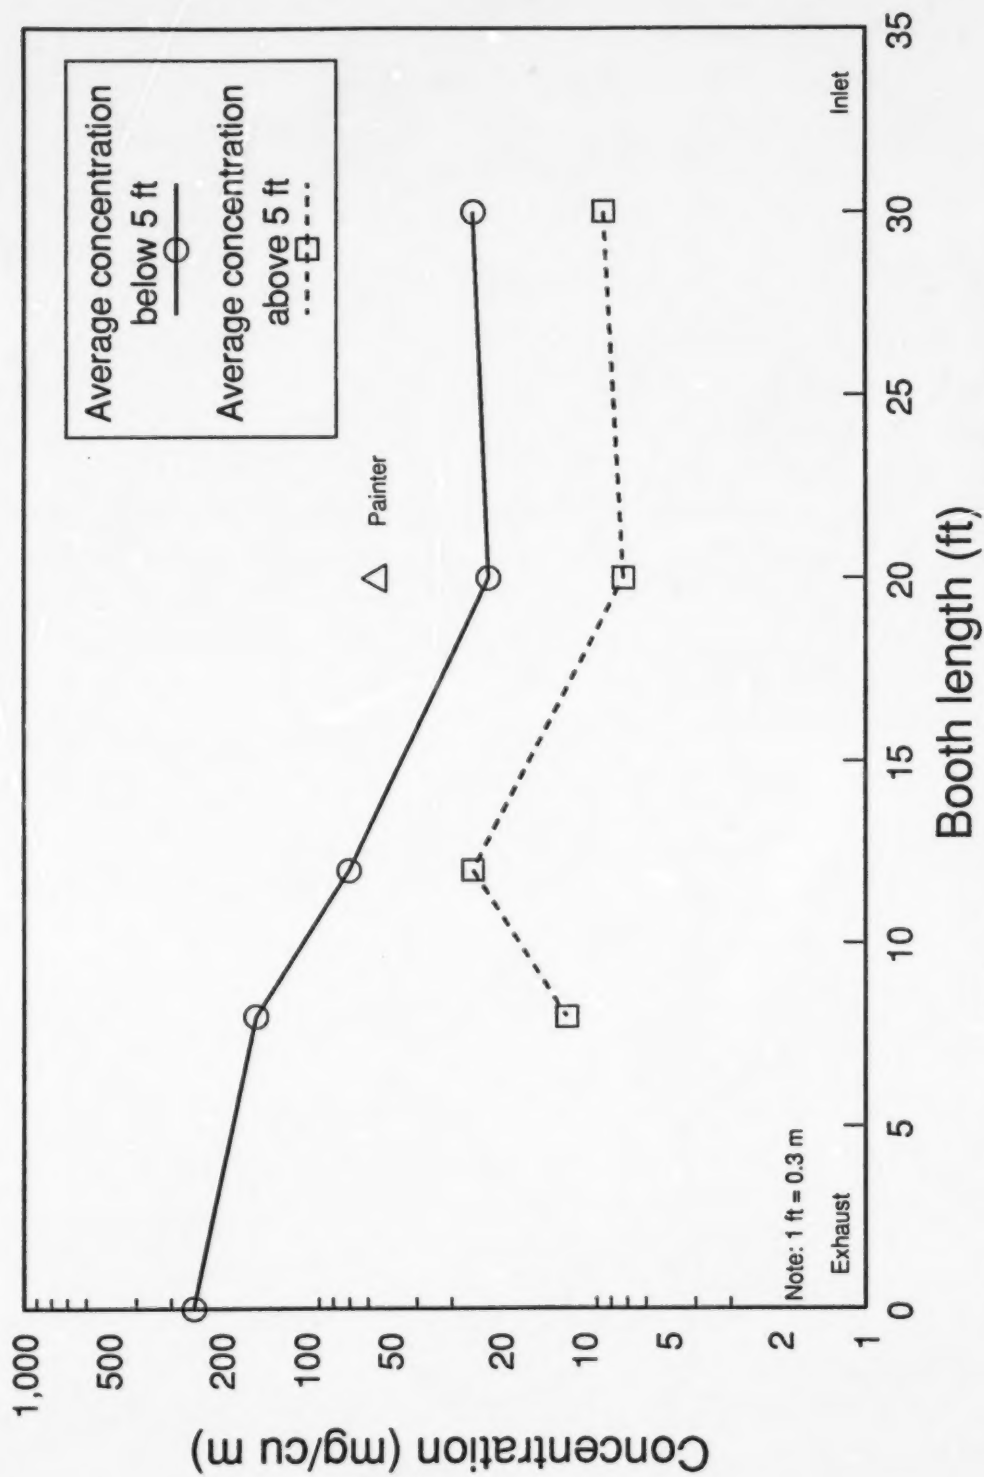


Figure 6. Average VOC concentration along length of test booth: VOC test 1.

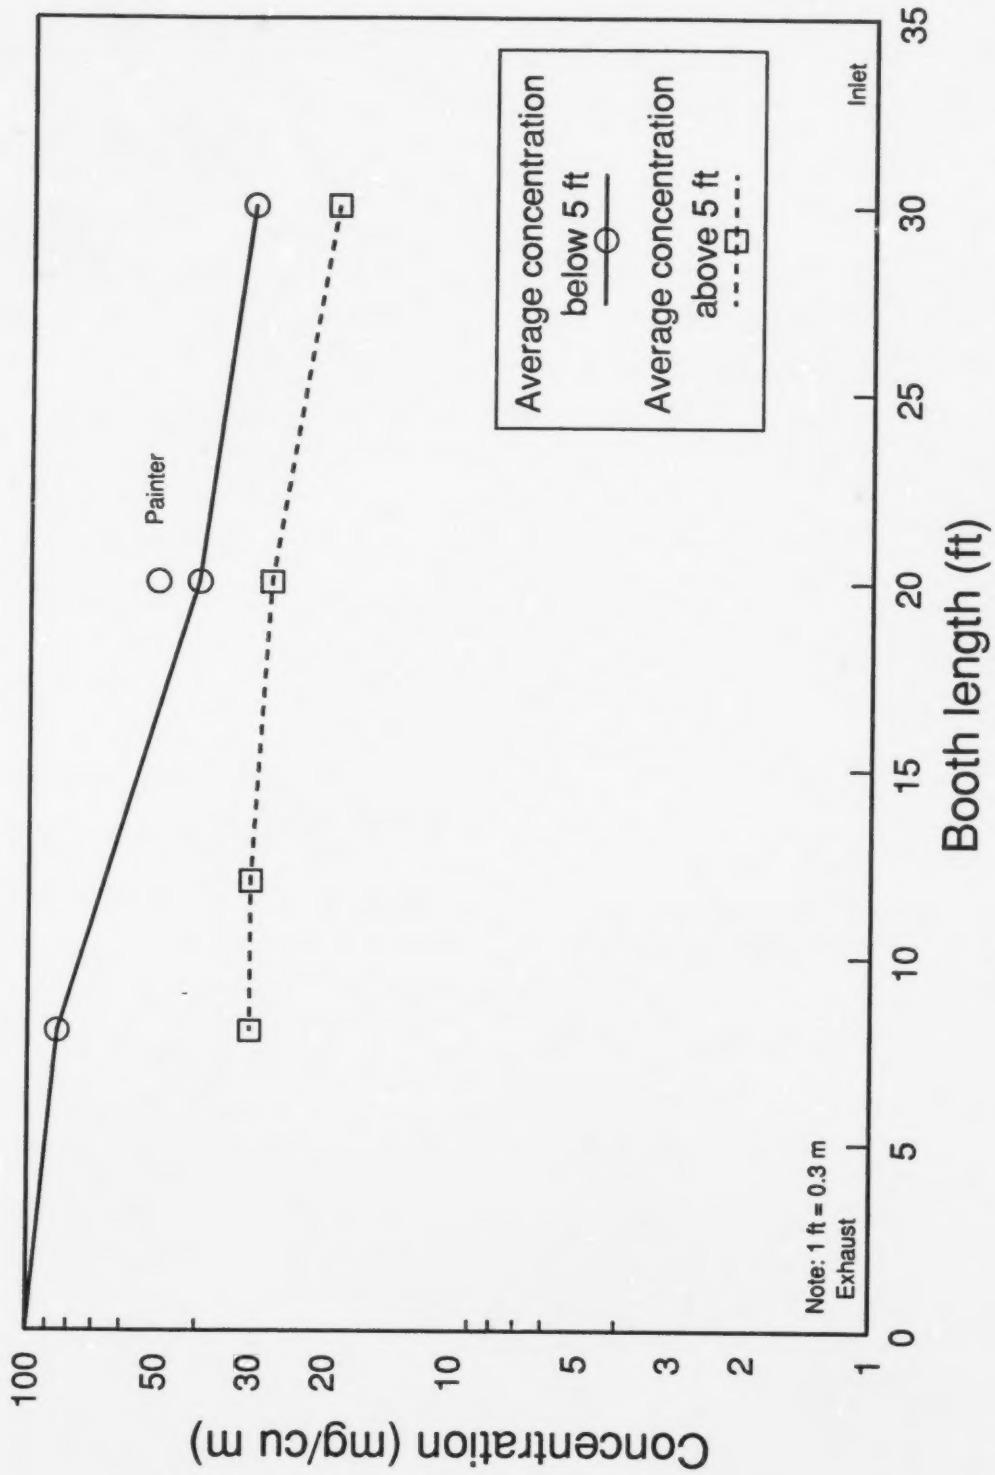


Figure 7. Average VOC concentration along length of test booth: VOC test 2.

These findings indicate a possible approach to enhance the effort to reduce the cost of controlling pollution from paint spray booths. First, since the particulate tends to fall as it progresses from the point of generation, by increasing the distance from the primary painting area to the booth exhaust exit, a significant portion of the particulate could be expected to fall at the lower levels of the booth. A similar scenario can also be envisioned for VOCs, but with greater efficiency. The results indicate that the partitioning of the booth into two zones might be an approach to reduce the volume of pollutant laden discharge that requires pollution control. One discharge, the lean stream from the upper region of the booth, might be directed to the atmosphere via only a particulate control system. The second stream, the pollutant rich discharge which contains the greatest volume of volatile pollutants, can be directed to a VOC control system. This would result in a significant reduction of the volume of exhaust that must be directed to a pollution control system. Partitioning the booth exhaust into two exhaust streams will not alter the operating characteristics of the booth. The booth can be operated within all of the safety and operating code requirements which govern flow volumes and velocities within spray booths. Assuming that the flow in the booth is approximately laminar, it is estimated that a minimum of 50 percent reduction of exhaust flow to the control system can be achieved by partitioning, yet permitting the capture of up to 80 percent of the booth exhaust pollutants. If feasible this scenario could result in a reduction in capital and operating cost for the control system since the total volume of gas that would require processing could be reduced compared to an unpartitioned booth.

At present the research results suggest only a possible concept for reducing the capital and operating cost for spray booth emissions control. It does indicate, however, that a significant portion of the process pollutants can be collected from a relatively small volume of the total booth air flow.